





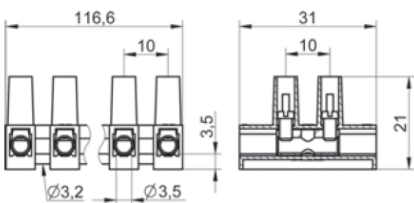






Técnica de conexiones

TEKOX

Since 1976

MADE IN SPAIN

1106 L	Voltage 750V (600V UL)	Current rating 41A (30A UL)	 0,5 Nm	 M 3	 110°C	 ways	 200 pcs. 323x235x170 mm	 7,1 Kg
	 <p>SOLID CABLE 6 mm² / 1 mm² (10 AWG)</p>	<p>1106 L PH wire protector PH 4 mm² (12 AWG) / 32A (20A UL)</p> 		7,7 Kg				
	 <p>STRANDED CABLE 4 mm² / 1 mm² (10 AWG)</p>	<p>1106 L TS middle barrier TS</p> 		7,7 Kg				