


## Suspension Sets for use with OneTrack

OneTrack can be fixed directly to the ceiling using screws or with ceiling bracket or can be suspended on a steel cable. Lighting Australia offers three standard suspension kits featuring both A.A.G. Stucchi and Beretta components. Please contact us for details.

### Option 1: Adjust Length at Fitting


Parts Guide:

1 x Ceiling Attachment	BELT2010.1002 (S-9000/216)	Round head ceiling attachment with hole
1 x Wire Length	BES4WX1.5 or	Steel cable (1.5m) with spherical end
	BES4WX3.0 or	Steel cable (3.0m) with spherical end
	BES4WX4.0 or	Steel cable (4.0m) with spherical end
	BES4WX5.0	Steel cable (5.0m) with spherical end
1 x Griplock	STS-9000/218 +ST602/F	M5 griplock + hexagonal head screw
1 x Track Bracket	STS-9000/312-LA or	Short pendant linear bracket (with countersunk hole)
	STS-9000/122-LA	Long pendant linear bracket (with countersunk hole) <i>For use where a Jointing Connector is being used</i>

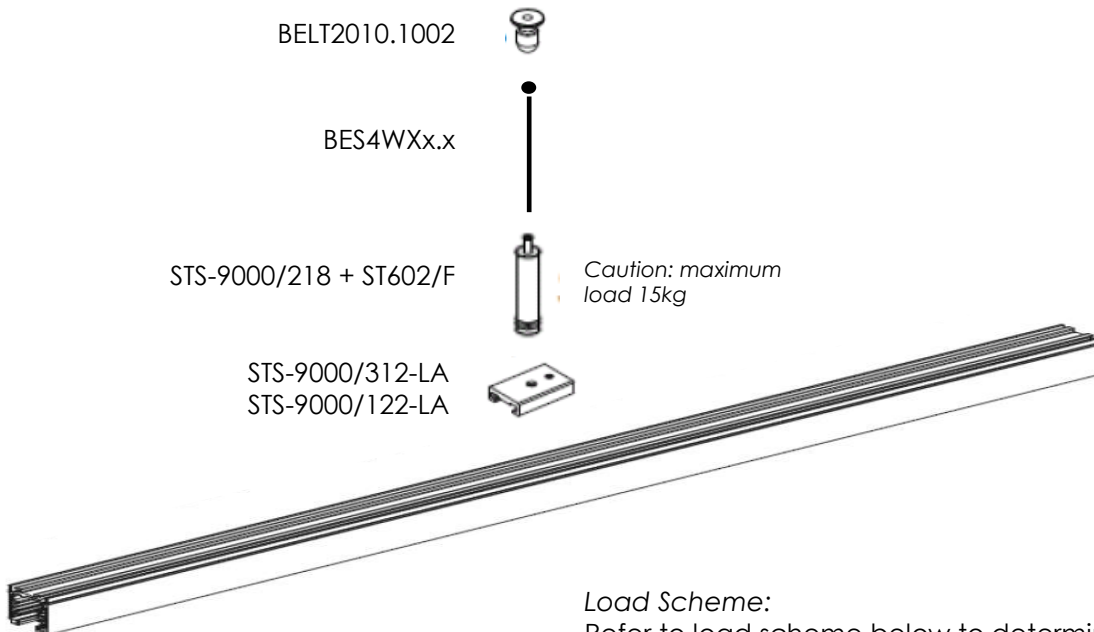

### Load Scheme:


Refer to load scheme below to determine number of suspension kits required for your Onetrack project.

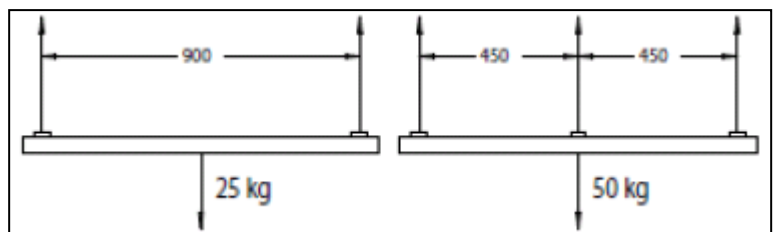

**Option 2: Adjust Length at Ceiling**


Parts Guide:

1 x Ceiling Attachment	BELT2035.1002	Cylindrical ceiling attachment
1 x Griplock	BE41500	Griplock with Safety Lock <i>Caution: maximum load 15kg</i>
1 x Wire Length	BES4WX1.5 <i>or</i>	Steel cable (1.5m) with spherical end
	BES4WX3.0 <i>or</i>	Steel cable (3.0m) with spherical end
	BES4WX4.0 <i>or</i>	Steel cable (4.0m) with spherical end
	BES4WX5.0	Steel cable (5.0m) with spherical end
1 x Track Bracket	STS-9000/112-SV <i>or</i>	Short flaring pendant bracket
	STS-9000/122-SV	Long flaring pendant bracket <i>For use where a Jointing Connector is being used</i>

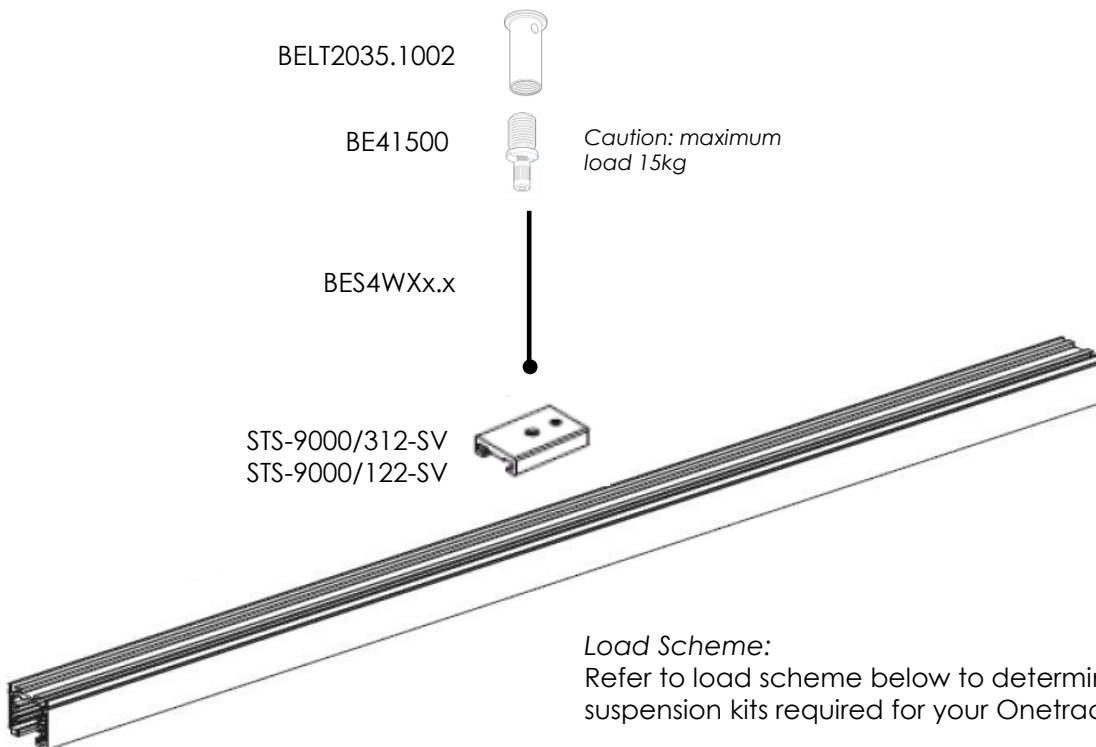

**Load Scheme:**

Refer to load scheme below to determine number of suspension kits required for your Onetrack project.

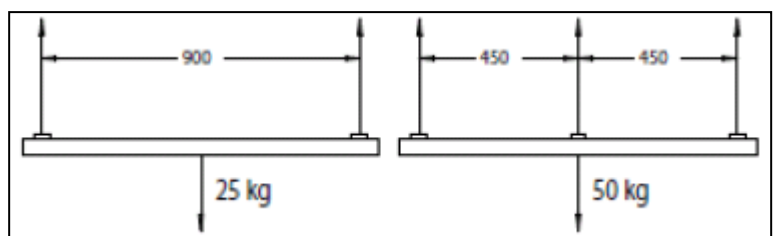


**Suspension Sets for use with OneTrack**

**Option 3: Hook Suspension**

Parts Guide:

1 x Ceiling Attachment	BELT2010.1002 (S-9000/216)	Round head ceiling attachment with hole
1 x Wire Length	BES4WX1.5 or	Steel cable (1.5m) with spherical end
	BES4WX3.0 or	Steel cable (3.0m) with spherical end
	BES4WX4.0 or	Steel cable (4.0m) with spherical end
	BES4WX5.0	Steel cable (5.0m) with spherical end
1 x Griplock with hook	BELT1070.0002 (S-9000/213)	Griplock with hook and side hole <i>Caution: maximum load 15kg</i>
1 x T-Pendant Track Bracket	STS-9000/113 or	Short T-pendant bracket
	STS-9000/123	Long T-pendant bracket <i>For use where a Joining Connector is being used</i>

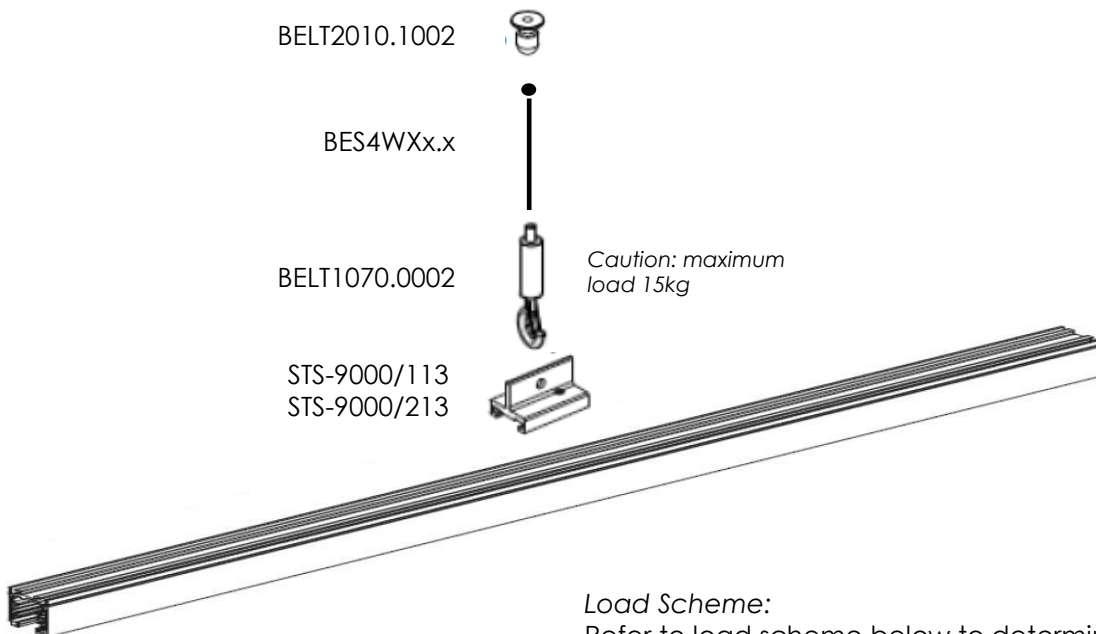

**Load Scheme:**

Refer to load scheme below to determine number of suspension kits required for your Onetrack project.

